



**SpeedRoller Strong Outdoor - Tormatic** (Without hood) Dimensions and installation requirements



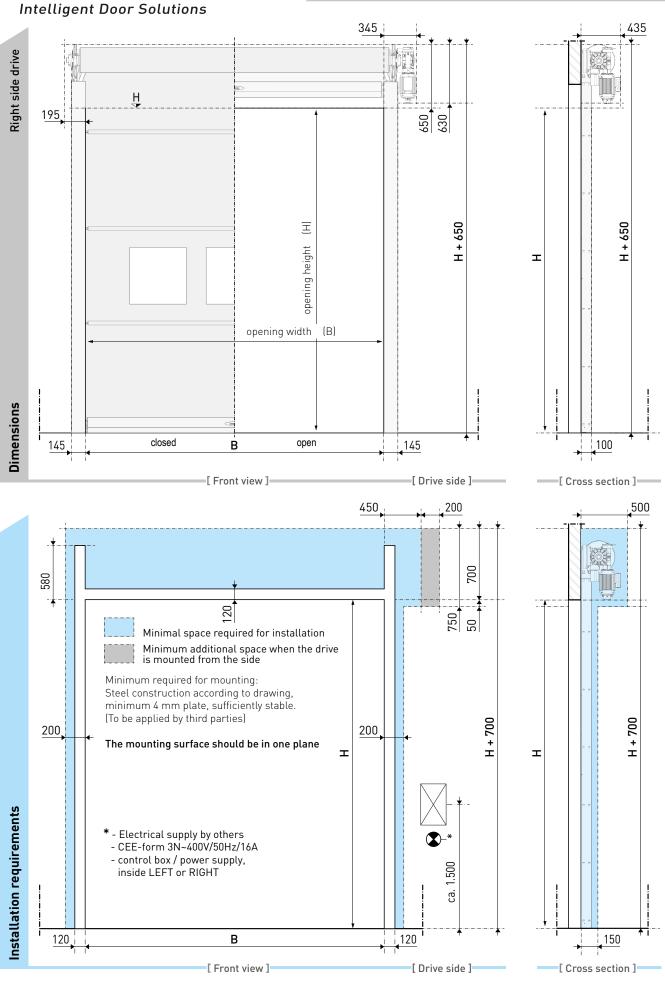


#### **SpeedRoller Strong Outdoor - Tormatic** (Without hood) Dimensions and installation requirements

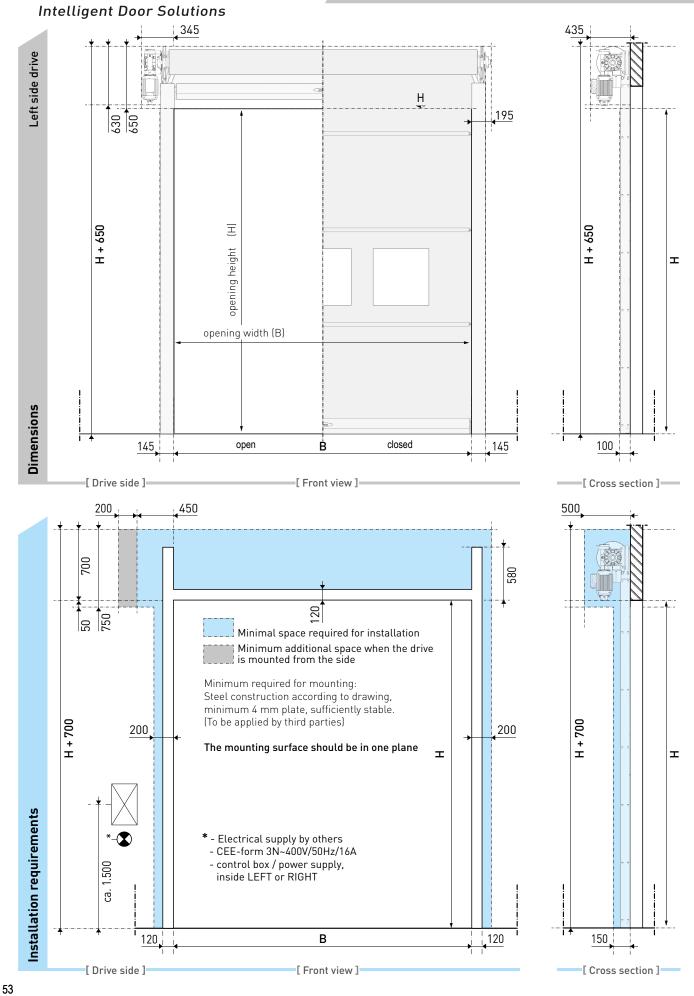




## SpeedRoller Strong Outdoor - GFA (Without hood) Dimensions and installation requirements

#### Intelligent Door Solutions

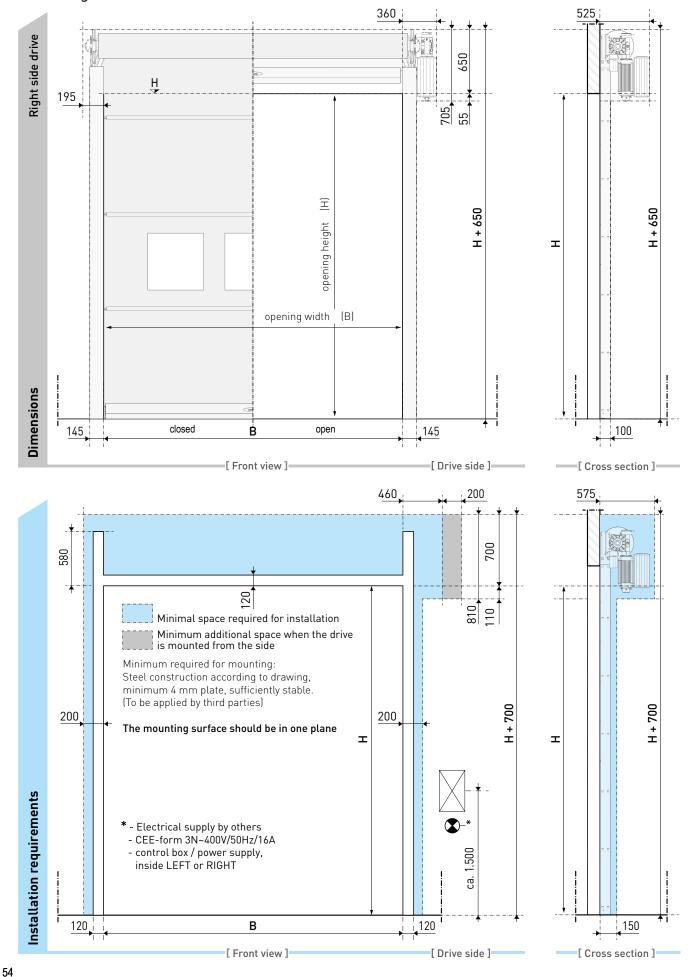



## SpeedRoller Strong Outdoor - GFA (Without hood) Dimensions and installation requirements

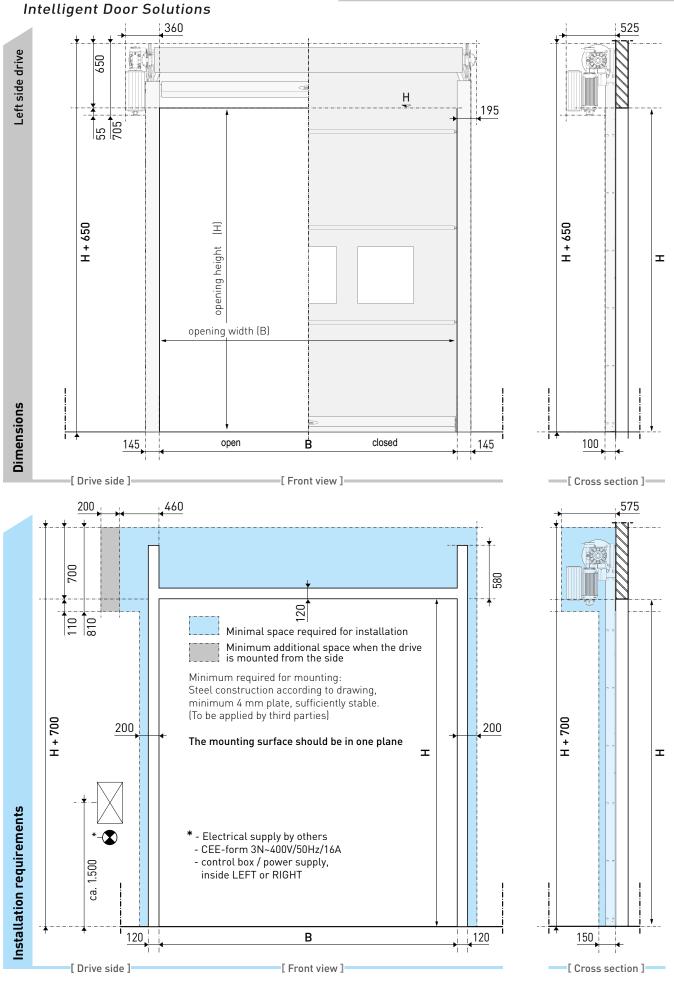


55



**SpeedRoller** Strong Outdoor - Tormatic (draught excluder - lintel seal) Dimensions and installation requirements

Intelligent Door Solutions

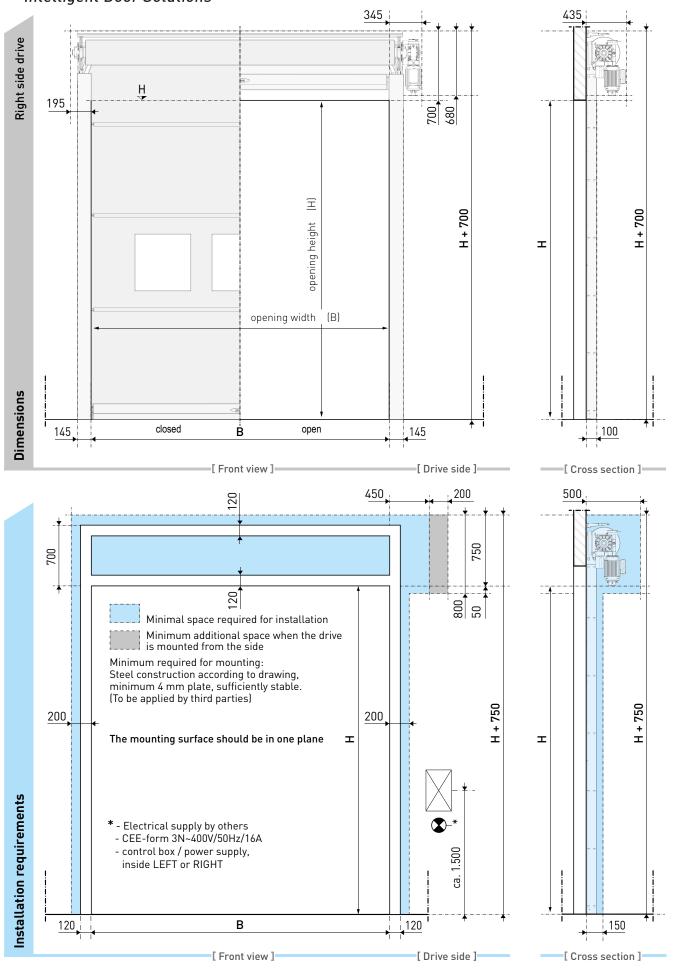

novoferm


**SpeedRoller** Strong Outdoor - Tormatic (draught excluder - lintel seal) Dimensions and installation requirements

Intelligent Door Solutions 345 435 Left side drive Н 195 680 700 Ξ H + 700 H + 700 opening height т opening width (B) Dimensions open closed 145 b 145 100 [Drive side] [Front view] [ Cross section ]= 200 450 500 120 750 700 20 50 800 Minimal space required for installation Minimum additional space when the drive is mounted from the side Minimum required for mounting: Steel construction according to drawing, minimum 4 mm plate, Sufficiently stable. (To be applied by third parties) H + 750 H + 750 200 200 The mounting surface should be in one plane т т Installation requirements T - Electrical supply by others - CEE-form 3N~400V/50Hz/16A - control box / power supply, 1.500 inside LEFT or RIGHT ся. 120 В 120 150 [Drive side] [Front view] [ Cross section ]

57




SpeedRoller Strong Outdoor - GFA (draught excluder - lintel seal) Dimensions and installation requirements

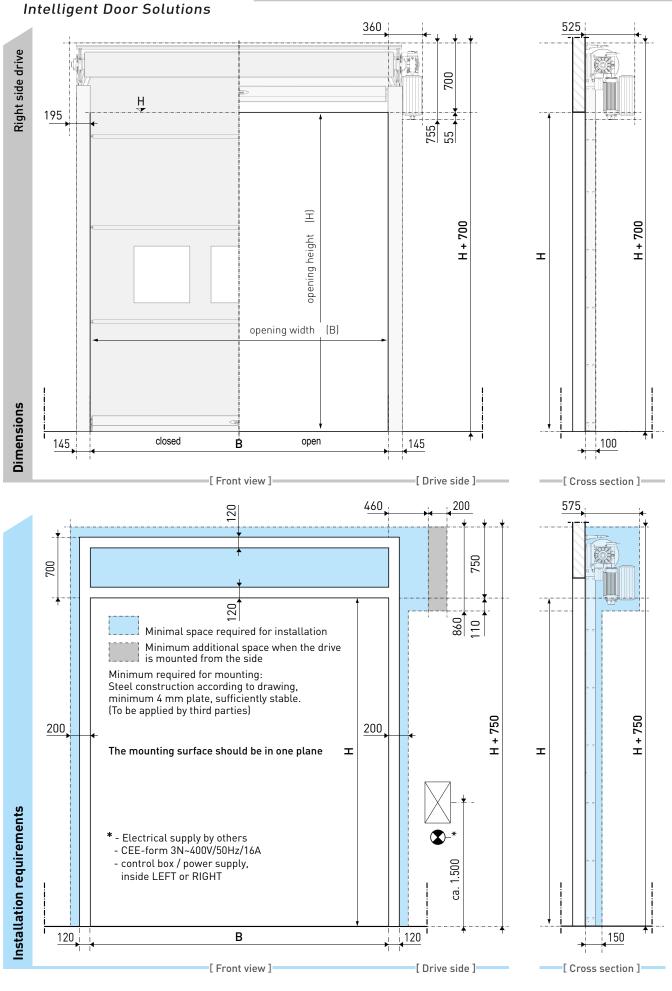


novoferm

# **SpeedRoller Strong Outdoor - GFA** (draught excluder - lintel seal) Dimensions and installation requirements

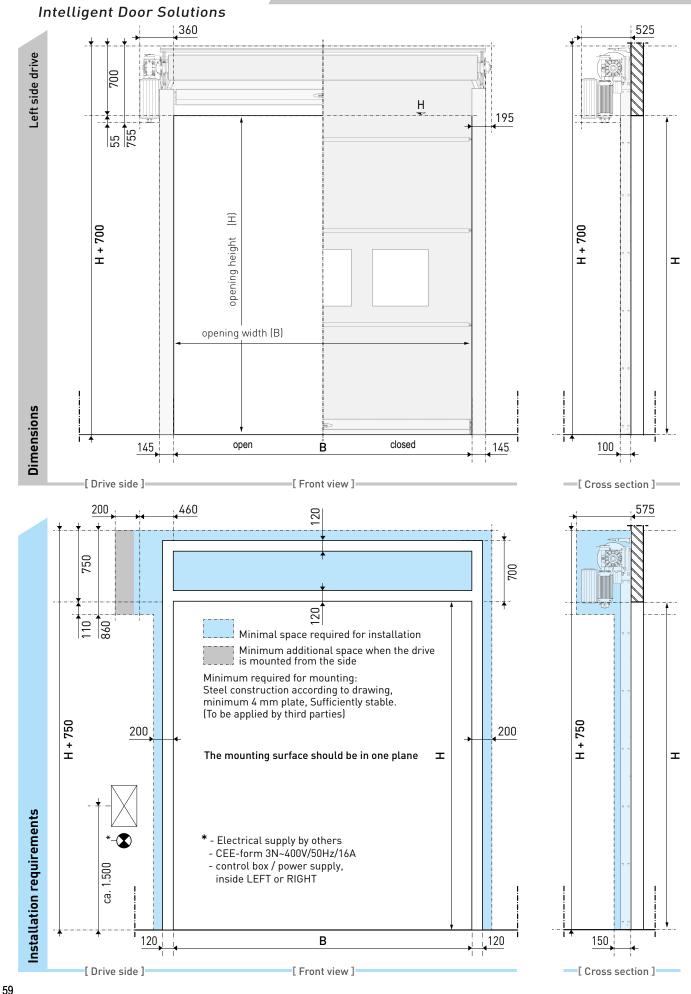




## SpeedRoller Strong Outdoor (With hood) Dimensions and installation requirements

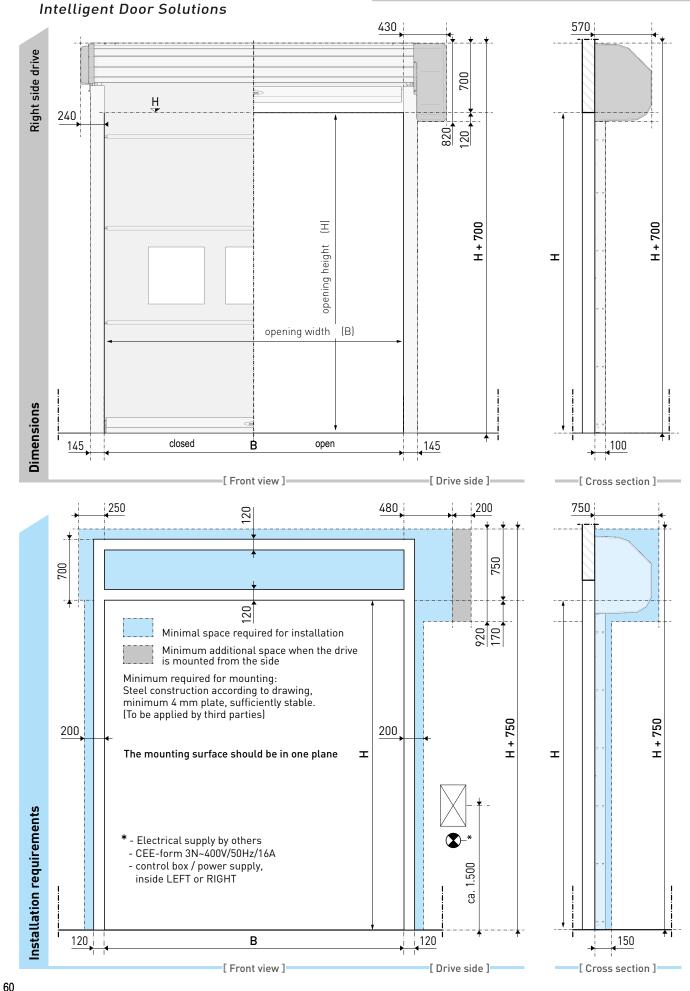



## SpeedRoller Strong Outdoor (With hood) Dimensions and installation requirements

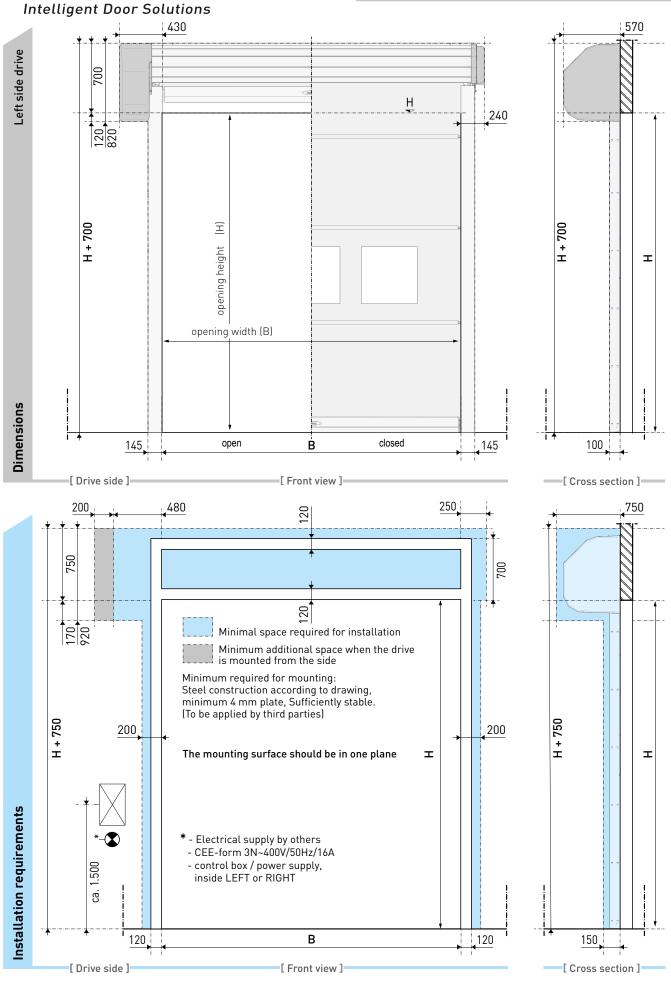

61